


Δονητές με έμβολο, Σειρά FP

Απόδοση

Μοντέλο	Δονήσεις 1000/λεπτό		Ισχύς N		Κατανάλωση αέρα/λεπτό	
	2 Bar	6 Bar	2 Bar	6 Bar	2 Bar	6 Bar
FP-12-S	6.2	9.3	34	92	0.8	25
FP-12-M	5.0	6.7	34	74	0.5	19
FP-12-L	4.0	5.4	32	81	1.0	20
FP-18-S	5.0	7.7	66	187	5.0	57
FP-18-M	4.0	5.9	68	188	4.0	52
FP-18-L	3.1	4.6	64	206	5.0	46
FP-25-S	3.6	5.5	126	416	13	93
FP-25-M	3.0	4.2	142	504	23	87
FP-25-L	2.4	3.7	186	594	18	93
FP-35-S	3.8	5.8	294	1.038	23	162
FP-35-M	3.0	4.6	248	1.080	24	141
FP-35-L	2.4	3.6	282	1.066	38	135
FP-50-M	1.85	2.8	490	1600	48	190
FP-60-M	1.95	2.7	610	2170	90	275
FP-95-M	1.8	2.8	1620	6150	170	490

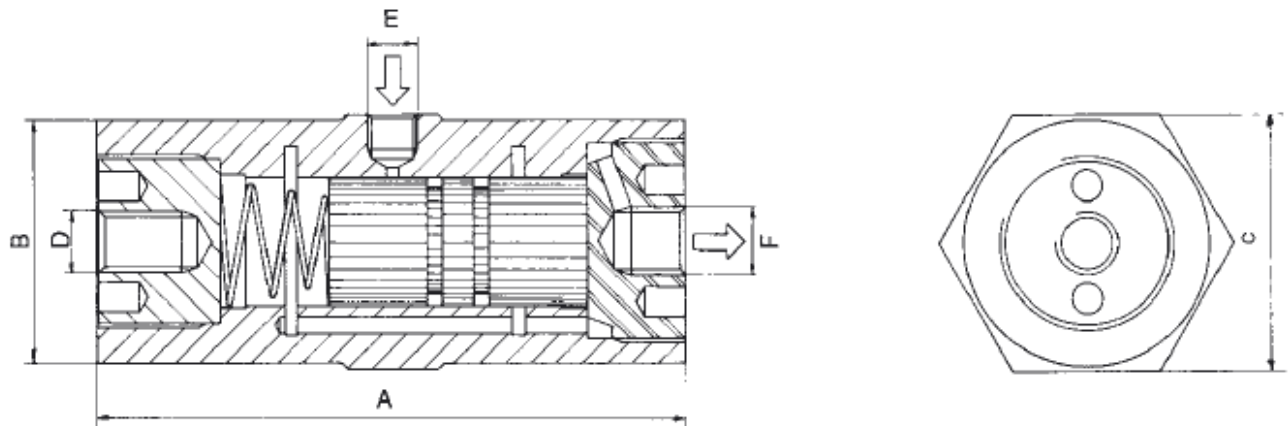

Διαστάσεις σε mm

Μοντέλο	A Μήκος mm	C SW mm	D σπείρωμα	E είσοδος	F έξοδος
FP-12-S	71	34	M-8	1/8"	1/8"
FP-12-M	81	34	M-8	1/8"	1/8"
FP-12-L	94	34	M-8	1/8"	1/8"
FP-18-S	81	42	M-10	1/8"	1/8"
FP-18-M	94	42	M-10	1/8"	1/8"
FP-18-L	109	42	M-10	1/8"	1/8"
FP-25-S	98	50	M-12	1/8"	1/4"
FP-25-M	116	50	M-12	1/8"	1/4"
FP-25-L	136	50	M-12	1/8"	1/4"
FP-35-S	98	65	M-12	1/4"	1/4"
FP-35-M	116	65	M-12	1/4"	1/4"
FP-35-L	136	65	M-12	1/4"	1/4"
FP-50-M	154				
FP-60-M	154				
FP-95-M	156				